
NOBEL-E 11-08

Screw compressor with direct drive transmission.

Lubricated screw compressor with coaxial transmission. Modern and versatile LOGIN electronic controller. Compact and quiet

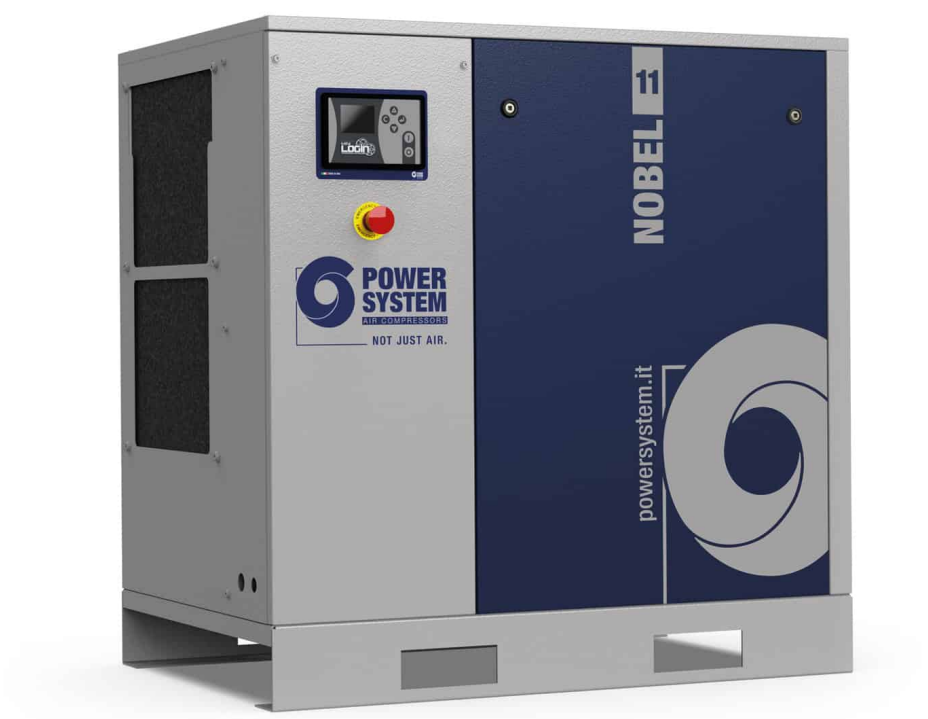

TECHNICAL DATA

Product code		V60LT92PWSA87
Lubrication		Lubricated
Air-end		FS50
Air receiver (l)		-
Power		11
Air outflow	l/min.	1700
	m3/min.	1.7
	c.f.m.	60
Max. pressure	bar	8
	p.s.i.	116
Nr. of stages		1
Sound level (dB(A))		63
Voltage / Frequency (Volt / Hz)		400/50
Connection (G)		3/4"
Controller		LOGIN MINI
Type motor		Electric
Energy efficiency		IE3
Gross weight (kg)		221
Net weight (kg)		200
Packaging dimensions LxWxH (mm)		1200x810x1220
Net Dimensions LxWxH (mm)		970x680x960

*Sound pressure level measurement carried out at a distance of 7 metres.