


NOBEL 76-08

Screw compressor with direct drive transmission.

Lubricated screw compressor with coaxial transmission. Modern and versatile LOGIN electronic controller. Compact and silent

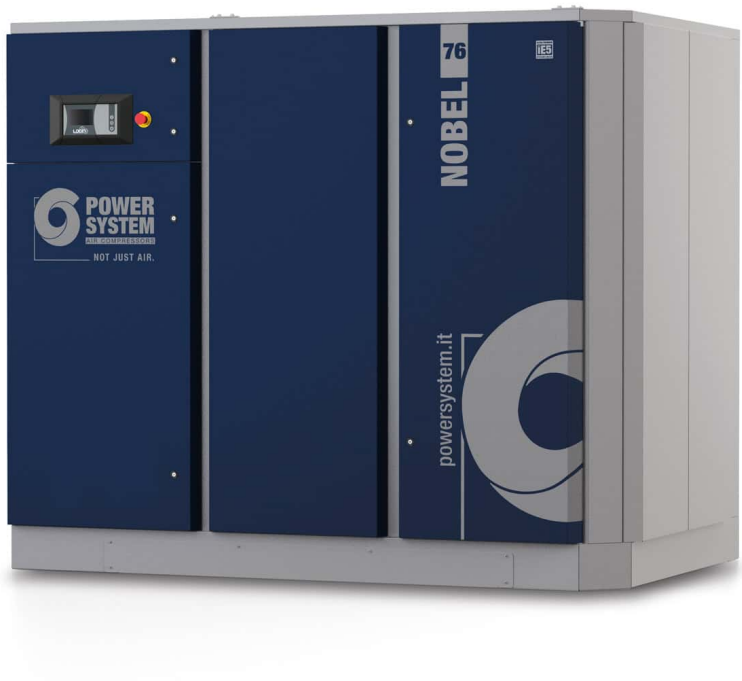

TECHNICAL DATA

Product code	V60MJ92PWSA87	
Lubrication	Lubricated	
Air-end	FS300	
Air receiver (l)	-	
Power	75	
Air outflow	l/min.	13500
	m3/min.	13,5
	c.f.m.	477
Max. pressure	bar	7,5
	p.s.i.	109
Nr. of stages	1	
Sound level (dB(A))	67	
Voltage / Frequency (Volt / Hz)	400/50	
Connection (G)	2"	
Controller	LOGIN	
Type motor	Electric	
Energy efficiency	IE4	
Gross weight (kg)	3078	
Net weight (kg)	2880	
Packaging dimensions LxWxH (mm)	2560x1660x2230	
Net Dimensions LxWxH (mm)	2330x1460x1980	

*Sound pressure level measurement carried out at a distance of 7 metres.